


BELT DRIVEN LIVE ROLLER – 1-3/8" ROLLERS

BC 1030

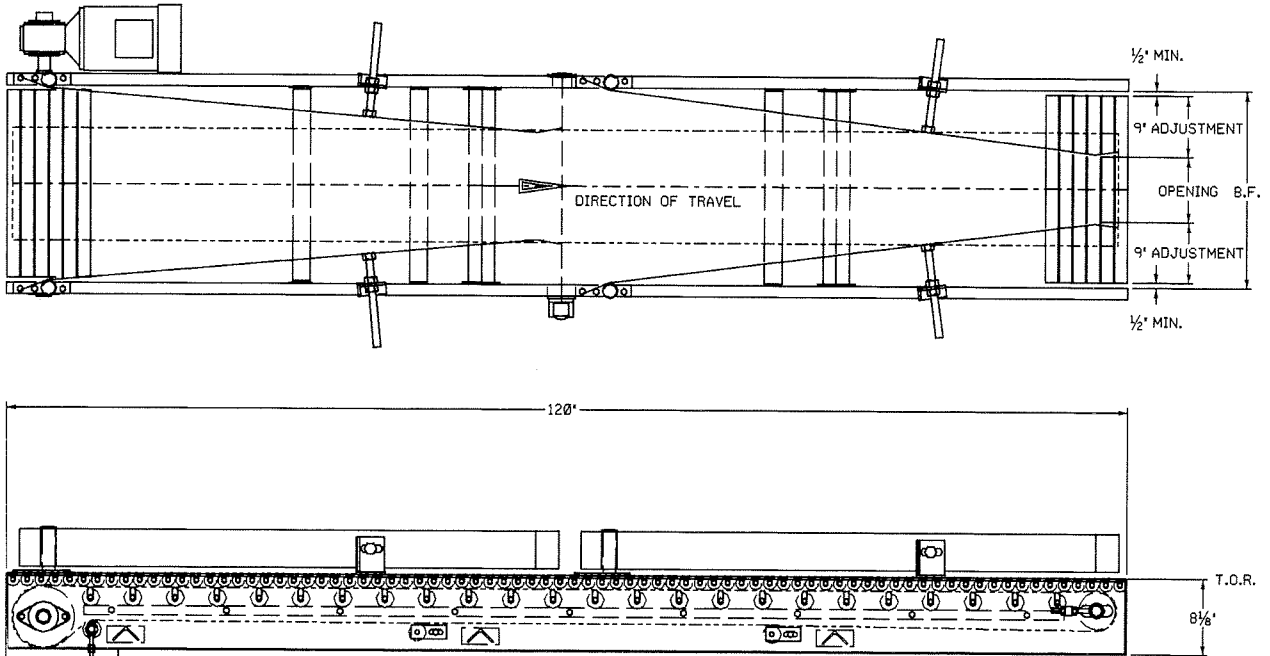

STANDARD SPECIFICATIONS

- Std. Length – 10 ft.
- Std. Widths – (BF) 15", 21", 24"
- Std. Widths – (OAW) 17 1/2", 23 1/2", 26 1/2"
- Frames – 8" x 10 GA x 1 1/4"
- Rolls
 - Carrying – 1 3/8" Dia. x 16 GA GP Roll
7/16" Hex on 1 1/2" Ctrs
 - Pressure – 1.9" Dia. x 16 GA GP Roll
7/16" Hex on 6" Ctrs
 - Return – 1.9" Dia. x 16 GA GP Roll
7/16" Hex on 6" Ctrs
- Drive Pulley – 6" crowned & belt lagged pulley
- TE Pulley – 4" crowned
- Snub Idler – 2" pulley, screw adjustable
- Driving Belt – PVC belting #125 12" wide friction surface both sides 5/32" thick with clipper lacing

- Guards – 6" formed channel 12 GA
- Min. Elev. – 10 1/2"
- Motor – Std. 3/4 HP, 230/460V, 3 PH, 60HZ, C face with shaft mounted reducer
 - Speed – 120 FPM
 - Capacity – 100 lbs/ft.
 - Supports – 3 1/2" channel adjustable

OPTIONS

- Belt Speeds – As required from 45 FPM to 120 FPM
- Conveyor Lengths – Additional lengths upon request
- Ceiling Hangers – 1/2" threaded rod welded to 2" x 2" x 1/4" angle frames in varying lengths up to 10 ft.