


BELT CONVEYOR ROLLER BED

BC 5020

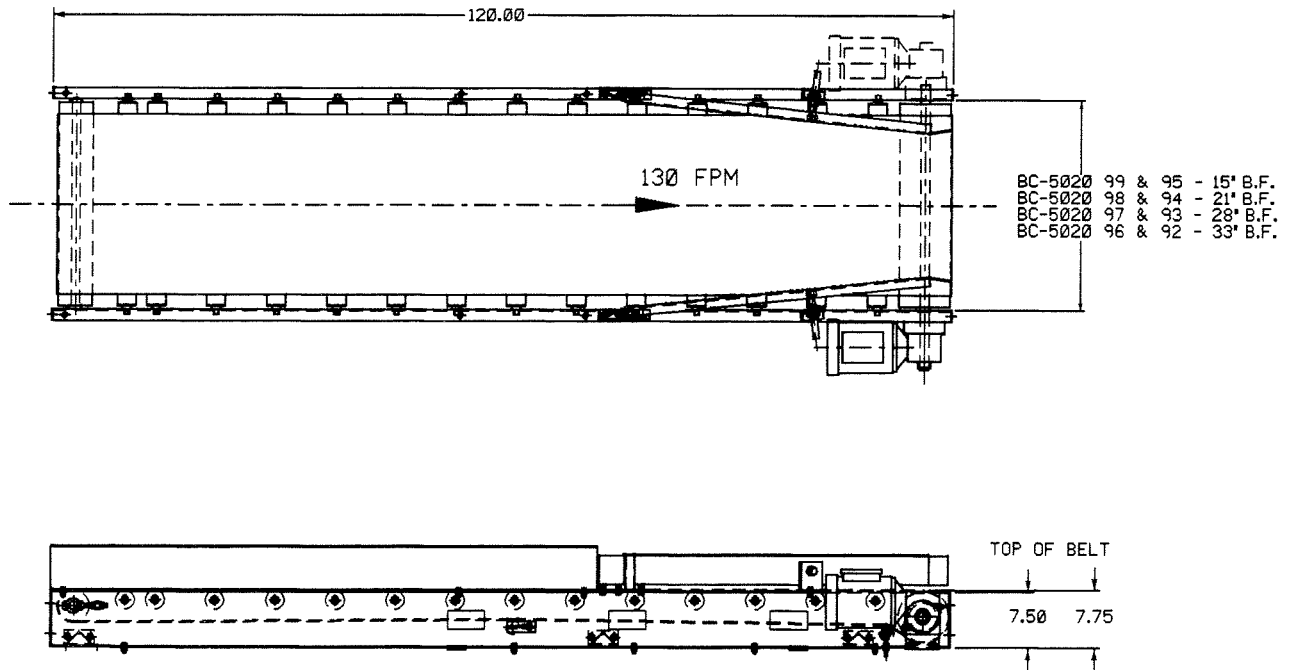

STANDARD SPECIFICATIONS

- Std. Length – 10 ft.
- Std. Widths – (BF) 15", 21", 28", 33", less motor
- Std. Widths – (OAW) 18", 24", 31", 36", less motor
- Frames – 7¹/₂" x 10 GA x 1¹/₂" formed channel
- Rollers – 2¹/₂" Dia. on 8" centers
- Min. Elev. – 10"
- Speed – 130 FPM
- Capacity – 150 lbs/ft.
- Motor – LH or RH mounted 1/2 HP C face with shaft mounted reducer
- Belt – PVC belting friction surface

- Pulleys
 - Drive – 6"
 - Idler – 4"
 - Snub – 2"
- Supports – 3¹/₂" channels adjustable - one support each end
- Guards – 6" formed channel 12 GA
- Deflector – (if req'd), 4" x 3/16" plate adjustable

OPTIONS

- Belt Speeds – As required up to 130 FPM
- Conveyor Length – Additional lengths up to 15 ft.
- Ceiling Hangers – 1/2" threaded rod welded to 2" x 2" x 1/4" angle frames in varying lengths up to 10 ft.