


5' WIRE MESH CONVEYOR FOR PALLET LOADS

FP 4025

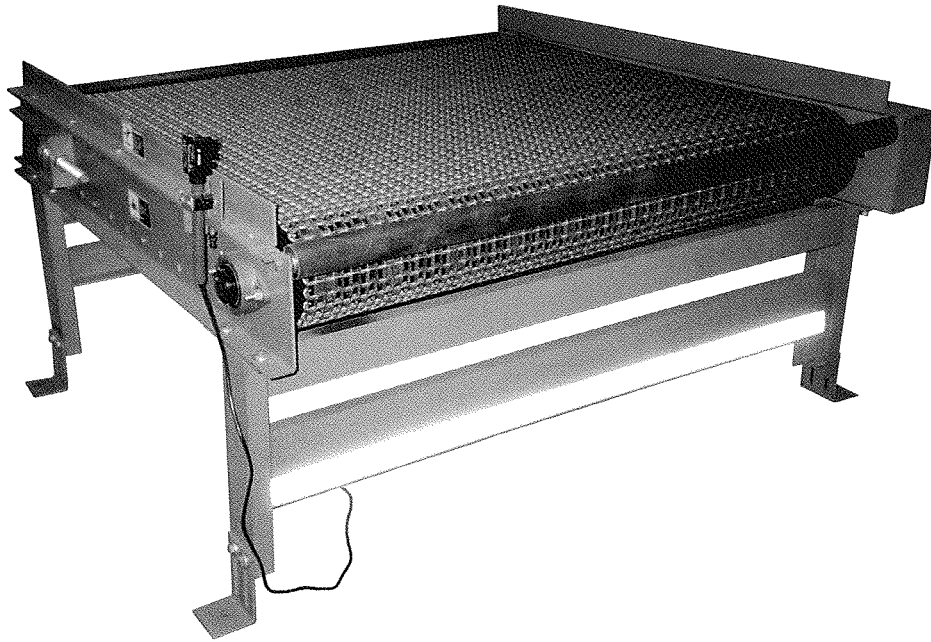

STANDARD SPECIFICATIONS

- Frame & Bed – 2¹/₂" rollers, 1¹/₁₆" shaft 11 GA mounted on 4" centers in a 9" deep 1/4" HRS channel with 2" flanges
- Frame Width – 60" BF
- Drive Sprockets – 18 T hardened machine sprocket
- Belt Width – 56", 1/2" x 1" clinched edge wire mesh belting
- Motor – 1 HP 230/460V, 60HZ, 3PH
- Take Up – Bearing adjustment using threaded rod on tail sprocket

- Return Rolls – 2¹/₂" Dia. rollers
- Guards Rails – 3" x 2" x 1/4" angle
- Floor Supports – Standard heavy-duty adjustable. One support each end of the conveyor
- Capacity – 200 lbs/ft.

OPTIONS

- Speeds – From 30 to 60 FPM
- Additional Lengths – Up to 10 ft.

5' WIRE MESH CONVEYOR FOR PALLET LOADS

