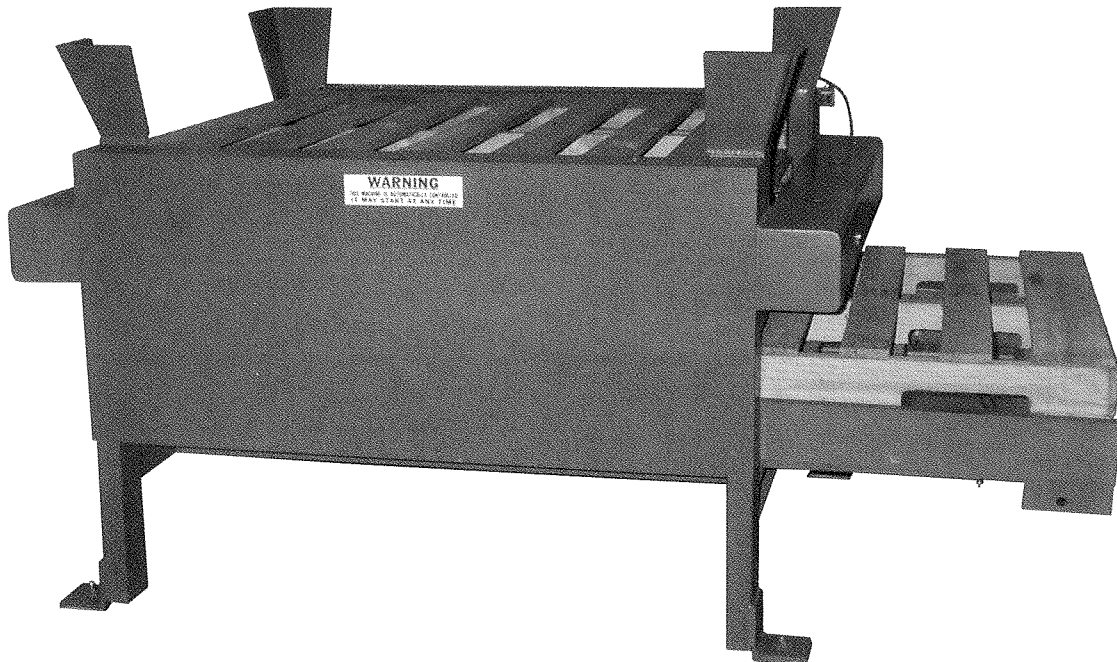


STAND ALONE PALLET DISPENSER**PD 4840****STANDARD SPECIFICATIONS**

- Stand Alone Unit
- Handles 48" x 40" GMA Pallet
- Rugged framework with personnel guarding
- Electrical/Pneumatic operation – No Hydraulics
- Standard elevation top of discharge conveyer
 - Minimum 18" • Maximum 30"
- Can be loaded from 3 sides
- Can easily stack 12-14 pallets
- Chain discharge conveyer outside dispenser up to 6'-0"
- Electrical controls including "OFF/ON" control, "CONVEYOR MOTOR STARTER": All completely wired

OPTIONS

- Vertical tubing on sides
- Low level pallet alarm light and horn
- Other types and sizes available

ON/OFF OPERATION

ON – The dispenser will dispense a pallet onto the discharge conveyer whenever it is empty and no pallet is detected by the photoeye. The pallet will move forward off the conveyer via a signal by the user.

OFF – If a jam occurs, the switch is turned "OFF." Once the pallet jam is corrected, the operator turns the switch to "ON." This provides the signal to dispense a pallet.